

MB/Dk4 / MB/Dk6



DRUM PACK

Stage-ready Midnight Blues® Pack offer outstanding application-specific microphone and accessories for performing and recording drummers.

All-metal construction, impressive sound and distinctive styling set Midnight Blues microphones apart from all other mics in their class. For loud and clear performance on a budget, cut through the mix with Midnight Blues® Packs: drum miking essentials from Audio-Technica.



Make an impact

The **MB/Dk4** Drum Pack includes a core selection of four microphones specifically engineered for drum applications. The three included **MB 5k** snare/tom microphone and one **MB 6k** kick microphone feature low-profile design for minimum visibility and versatile placement options around the drum kit. Also included in the package are three drum-rim microphone mounts and a durable carrying case.

MB/Dk4 DRUM PACK

INCLUDES

- 3 pcs - **MB 5k**
snare/tom microphone.



- 1 pc - **MB 6k**
kick microphone.



- 3 pcs - **AT8665**
Low-profile drum-rim microphone mounts.



- A Durable carrying case; interior padded with die-cut foam compartments.



Studio-quality performance

The comprehensive **MB/Dk6** Drum Pack expands on the **MB/Dk4** Drum Pack with the addition of two **MB 4k** cardioid condenser microphone ideal for drum overhead miking.

MB/Dk6 DRUM PACK

INCLUDES

- 2 sets - **MB 4k**
cardioid microphone
with stand clamps.



- 3 pcs - **MB 5k**
snare/tom microphone.



- 1 pc - **MB 6k**
kick microphone.





- 3 pcs - **AT8665**
Low-profile drum-rim microphone mounts.



- A Durable carrying case; interior padded with die-cut foam compartments.



MB4k

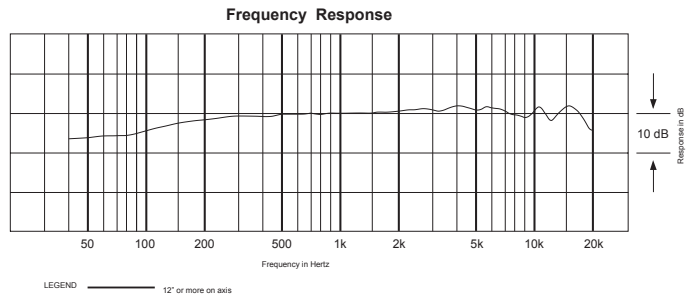

SPECIFICATIONS

ELEMENT	Fixed-charge back plate permanently polarized condenser	SIGNAL TO NOISE RATIO	70 dB, 1kHz at 1Pa
POLAR PATTERN	Cardioid	DYNAMIC RANGE (typically) (Phantom / Battery)	113 dB, 1kHz at Max SPL / 101 dB, 1kHz at Max SPL
FREQUENCY RESPONSE	80-20,000 Hz	PHANTOM POWER REQUIREMENTS	11-52V DC, 2 mA typical
OPEN CIRCUIT SENSITIVITY	-46 dB (5.0 mV) re 1V at 1 Pa (Phantom / Battery) -48 dB (3.9 mV) re 1V at 1 Pa	BATTERY TYPE	1.5V AA/UM3
IMPEDANCE	200 ohms / 250 ohms	BATTERY CURRENT/LIFE	0.4mA / 1200 hours typical
SWITCH	ON/OFF	WEIGHT (less accessories)	182 g
MAX INPUT SOUND LEVEL	137 dB SPL, 1kHz at 1% T.H.D. / (Phantom / Battery) 125 dB SPL, 1kHz at 1% T.H.D.	DIMENSIONS	205.7 mm - long, 41.7 mm dia.
		OUTPUT CONNECTOR	Integral 3-pin XLRM-type



MB5k

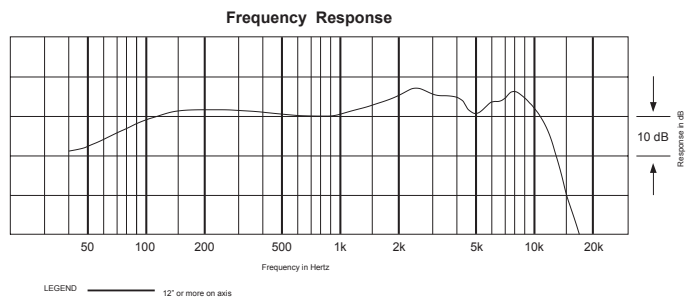

SPECIFICATIONS

ELEMENT	Dynamic	IMPEDANCE	500 ohms
POLAR PATTERN	Cardioid	WEIGHT	324 g
FREQUENCY RESPONSE	100-12,000 Hz	DIMENSIONS	113.2 mm - long, 41.5 mm dia.
OPEN CIRCUIT SENSITIVITY	-58 dB (1.2 mV) re 1V at 1 Pa	OUTPUT CONNECTOR	Integral 3-pin XLRM-type

MB6k

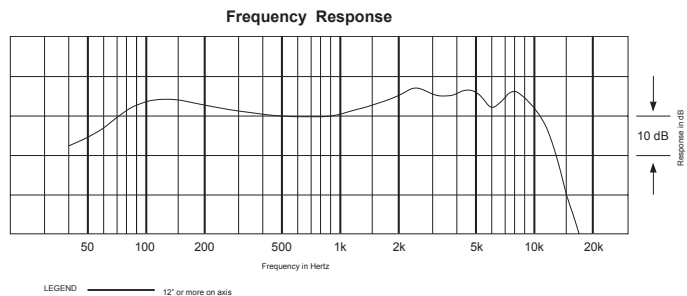

SPECIFICATIONS

ELEMENT	Dynamic	IMPEDANCE	500 ohms
POLAR PATTERN	Cardioid	WEIGHT	317 g
FREQUENCY RESPONSE	60-12,000 Hz	DIMENSIONS	116.5 mm - long, 53.5 mm dia.
OPEN CIRCUIT SENSITIVITY	-59 dB (1.1 mV) re 1V at 1 Pa	OUTPUT CONNECTOR	Integral 3-pin XLRM-type

MB/Dk4 / MB/Dk6



套鼓话筒套装

预舞台的Midnight Blues® 话筒套装，提供杰出的专业套鼓收音及录音应用。

全金属结构，感人的声音及特色的风格，是Midnight Blues® 话筒与别不同的地方。在有限的空间和费用上，鐵三角的Midnight Blues® 话筒套装能提供清晰及强劲的表现。



性价比上的冲击

MB/Dk4套鼓话筒套装包含了4支专业工程上的架子鼓话筒，3支MB 5k响弦鼓/高音鼓话筒及1支MB 6k脚踏鼓话筒，并配置小型鼓框夹式话筒支架，提供轻便及不显眼的的使用。另外，亦配有1个耐用手提箱，内含保护防撞海绵。

MB/Dk4 套鼓话筒套装

包括

- 3支 MB 5k
响弦鼓/高音鼓话筒



- 1支 MB 6k
脚踏鼓话筒



- 3支 AT8665
小型鼓框夹式话筒支架



- 1个耐用手提箱，内含保护防撞海绵。



专业录音室的表现

全面的MB/Dk6套鼓话筒套装，在MB/Dk4套装上再加上两支MB 4k心形电容式话筒，提供理想的套鼓收音组合。

MB/Dk6 套鼓话筒套装

包括

- 2套 MB 4k
心形话筒连支架



- 3支 MB 5k
响弦鼓/高音鼓话筒



- 1支 MB 6k
脚踏鼓话筒





- 3支 AT8665
小型鼓框夹式话筒支架



- 1个耐用手提箱，内含保护防撞海绵。



MB4k

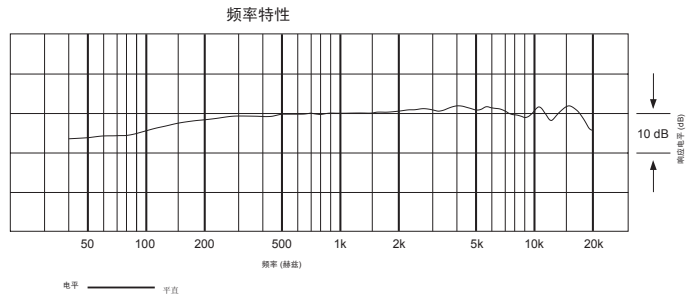

技术指标

收音头	固定充电背板, 静电型电容式	讯噪比	70 dB, 1kHz 于 1Pa
指向特性	心形指向性	动态范围 (典型) (幻象供电/电池)	113 dB, 1kHz 于最高声压/ 101 dB, 1kHz 于最高声压
频率响应	80-20,000 Hz	幻象供电	直流 11-52V, 耗电 2 mA 典型
开通灵敏度 (幻象供电/电池)	-46 dB (5.0 mV) 以 1V 于 1 Pa -48 dB (3.9 mV) 以 1V 于 1 Pa	电池类型	1.5V AA/单3型
阻抗	300 欧姆	电池耗电/寿命	0.4mA / 1200 小时典型
开关	开/关	重量 (不带附件)	182 克
最大承受声压 (幻象供电/电池)	137 dB 声压, 1 kHz 于 1% T.H.D./ 125 dB 声压, 1kHz 于 1% T.H.D.	外形尺寸	205.7 mm - 长, 41.7 mm 直径
		输出连接器	内置式3针卡农公头



MB5k

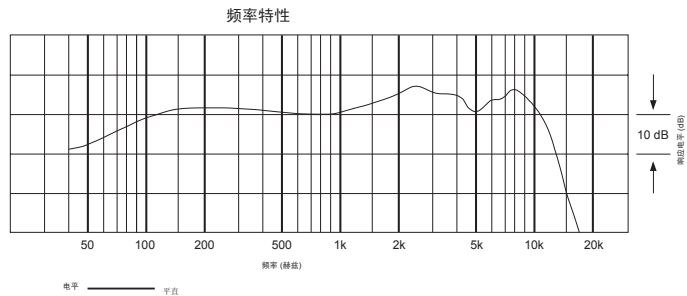

技术指标

收音头	动圈式	阻抗	500 欧姆
指向特性	心形指向性	重量	324 克
频率响应	100-12,000 Hz	外形尺寸	113.2 mm - 长, 41.5 mm 直径
开通灵敏度	-58 dB (1.2 mV) 以 1V 于 1 Pa	输出连接器	内置式3针卡农公头

MB6k

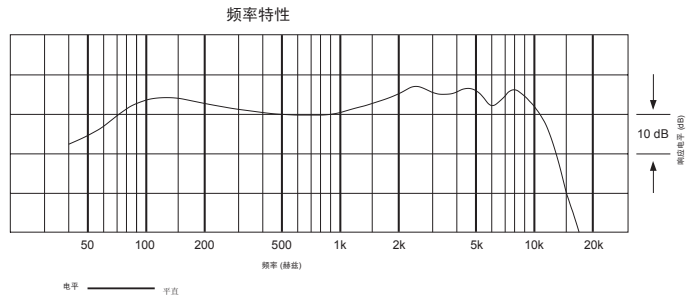

技术指标

收音头	动圈式	阻抗	500 欧姆
指向特性	心形指向性	重量	317 克
频率响应	60-12,000 Hz	外形尺寸	116.5 mm - 长, 53.5 mm 直径
开通灵敏度	-59 dB (1.1 mV) 以 1V 于 1 Pa	输出连接器	内置式3针卡农公头