

ES915H21 / ES915H24 **engineered**sound®

HYPERCARDIOID CONDENSER GOOSENECK MICROPHONE



ES915H is a wide-range miniature condenser microphone with a hypercardioid polar pattern. It is designed for quality sound reinforcement, professional recording, television and other demanding sound pickup applications. The small-diameter double gooseneck design permits highly flexible positioning while maintaining a smooth, well-contoured appearance. An included snap-on foam windscreen effectively reduces wind noise and "popping."

The ES915H is equipped with UniGuard® RFI-shielding technology, which offers outstanding rejection of radio frequency interference (RFI). The microphone is RoHS compliant – free from all substances specified in the EU directive on hazardous substances.

The microphone's hypercardioid polar pattern provides a 100° angle of acceptance. Additional interchangeable elements with omnidirectional (360°), cardioid (120°) and MicroLine® (90°) pickup patterns are available.

The integral power module can be powered from any external 11V to 52V DC phantom power supply. A recessed switch in the power module permits choice of flat response or low-frequency roll-off (via integral 80 Hz high-pass UniSteep® filter) to help control undesired ambient noise.

The microphone is enclosed in a rugged housing with a low-reflectance black finish. It features an XLRM-type connector insert at its base, allowing it to be plugged directly into an XLRM-type panel jack or microphone cable.

An AT8474 low-profile isolation mount or AT8473 stand clamp is optional to permit attachment of the XLR mic base to a standard 5/8"-27 or 3/8"-16 threaded mic stand or mounting flange.

The model of ES915H21 stands 533.4mm from the table or podium, it is also available in a 609.6mm version as ES915H24 model.

Output is low impedance balanced. The output connector mates with XLRM-type cable connectors. The balanced signal appears across Pins 2 and 3, while the ground (shield) connection is Pin 1. Output is phased so that positive acoustic pressure produces positive voltage at Pin 2, in accordance with industry convention.


The integral 80 Hz high-pass UniSteep® filter provides easy switching from a flat frequency response to a low-end roll-off. The roll-off position reduces the pickup of low-frequency ambient noise (such as traffic, airhandling systems, etc.), room reverberation and mechanically coupled vibrations. To engage the UniSteep® filter, use the end tip of a paperclip or other small pointed instrument to slide the switch toward the "bent" line.

Avoid leaving the microphone in the open sun or in areas where temperatures exceed 43°C for extended periods. Extremely high humidity should also be avoided.

SPECIFICATIONS

ELEMENT	Fixed-charge back plate permanently polarized condenser	
POLAR PATTERN	Hypercardioid	
FREQUENCY RESPONSE	80-20,000 Hz	
LOW-FREQUENCY ROLL-OFF	80 Hz, 18 dB/octave	
OPEN CIRCUIT SENSITIVITY	-40 dB (10.0 mV) re 1V at 1 Pa	
IMPEDANCE	250 ohms	
MAXIMUM INPUT SOUND LEVEL	138 dB SPL, 1 kHz at 1% T.H.D.	
DYNAMIC RANGE (typical)	109 dB, 1 kHz at Max SPL	
SIGNAL-TO-NOISE RATIO	65 dB, 1 kHz at 1Pa	
SWITCHES	Flat, roll-off	
PHANTOM POWER REQUIREMENTS	11-52V DC, 4 mA typical	
WEIGHT	ES915H21	140 g
	ES915H24	145 g
DIMENSIONS	ES915H21	533.4 mm - long
	ES915H24	609.6 mm - long
	ALL	8.4 mm - head diameter, 18.9 mm - base diameter
OUTPUT CONNECTOR	Integral 3-pin XLRM-type	
ACCESSORIES FURNISHED	AT8109 two-stage foam windscreen	
OPTIONAL INTERCHANGEABLE ELEMENTS	ESE-O omnidirectional (360°) ESE-C cardioid (120°) ESE-ML MicroLine® (90°)	

Polar Pattern




LEGEND
 200 Hz ———
 1 kHz ———
 5 kHz - - - - -
 8 kHz - - - - -

Optional Accessories:

AT8474 universal isolation mount.
 AT8473 quick-mount stand adapter.
 AT8506 four-channel 48V phantom power supply (AC powered).
 AT8668 quick-mount plug-in microphone desk stand.
 AT8801/EU single-channel 48V phantom power supply (AC powered).

Frequency Response

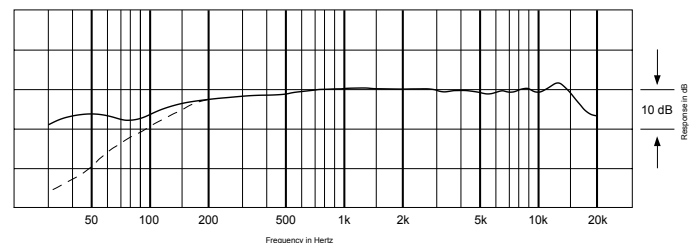

LEGEND ——— 12° or more on axis
 - - - - - Roll-off

audio-technica
 Machida • Tokyo • Japan

ES915H21 / ES915H24 engineered sound®

超心形指向性专业型双鹅颈式会议话筒



ES915H 是一枚阔频宽的电容式超心形指向性话筒，高质量的收音效能，设计于增强收音、专业录音、电视广播、会议等高要求的收音应用。双鹅颈的设计，可将收音头灵活调校到任何位置，并附有防风海绵罩，可减低在讲话时收到不雅的喷气声及其他风声的情况出现。

ES915H 配备有 UniGuard® - 射频干扰(RFI)屏蔽技术，提供杰出的防止射频干扰能力，避免收音时受到如手提电话等的干扰。话筒亦符合 RoHS 规格，在构造上不含有欧盟禁用的危害性物质。

话筒的超心形指向性提供 100° 的收音角度，并可选配其他适合的收音头配合实际的应用，包括全指向性 360°、心形指向性 120° 及超指向性 MicroLine® 90°。

内置的供电模组使用直流 11V 至 52V 幻象供电工作。而外壳上的一个隐藏的小型开关 UniSteep®，可设定 80 Hz 高通滤波及平直响应。

话筒外壳使用耐用的合金铸造，并涂上黑色不反光涂层。底部接线端为标准的 XLRM-3 卡农公头，可连接到任何以 XLRF-3 设计的会议话筒上。并可选配 AT8474 绝缘防震座或 AT8473 快速插头至 5/8"-27 或 3/8"-16 转接器。

ES915H21 型号全长为 533.4 mm，可安装在桌面或控制面板上使用。另外，ES915H24 型号全长为 609.6 mm。


低阻抗的平衡音频输出，音频信号以卡农公头输出端子的 2 号及 3 号针脚输出，而 1 号针脚则为地线(屏蔽)连接。输出相位将以正相位电平设于 2 号针脚上。

内置高质量 UniSteep® 高通滤波电路，可轻易由平直的频率响应，开启为于 80 Hz 以下衰减的收音效果，高通滤波器可减低话筒在近距离讲话收音时的喷气声，并可减低收音环境中低频噪声(如外间汽车引擎声，空调系统的风声等)，房间中的回声及机械性的震动声。

把话筒暴露于高温中可能导致输出电平逐渐及永久性减弱，应避免将话筒留在日晒的地方或长时间置于温度超过 43°C 的地方，而极高湿度也应避免。

技术指标

收音头	固定充电背板， 静电型电容式	
指向特性	超心形单指向性	
频率响应	80-20,000 Hz	
高通滤波	80 Hz, 18 dB/octave	
开通灵敏度	-40 dB (10.0 mV) 以 1V 于 1 Pa	
输出阻抗	250 欧姆	
最大承受声压	138 dB 声压, 1 kHz 于 1% T.H.D.	
动态范围 (典型)	109 dB, 1 kHz 于最高声压	
讯噪比	65 dB, 1 kHz 于 1Pa	
开关	平直, 高通滤波	
幻象供电	直流 11-52V DC, 耗电 4 mA 典型	
重量	ES915H21 ES915H24	140 克 145 克
外形尺寸	ES915H21 ES915H24 全部	533.4 mm - 长 609.6 mm - 长 8.4 mm - 收音头直径, 18.9 mm - 底部直径
输出连接器	内置式 3 针卡农公头	
附属品	AT8109 双层式防风海绵罩	
可转换收音头	ESE-O 全方向指向 (360°) ESE-C 心形指向 (120°) ESE-ML MicroLine® 超指向性 (90°)	

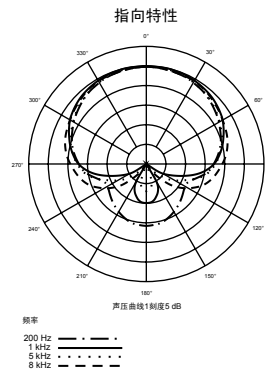

选择配件:

- AT8474 绝缘防震座。
- AT8473 快速插头转接器。
- AT8506 四通通 48V 幻象供电电器 (交流供电)。
- AT8668 座桌快速安装话筒座。
- AT8801/EU 单通道 48V 幻象供电电器 (交流供电)。

频率特性

